

FLAGPOLE TRUCKS & ACCESSORIES



ST-1 SERIES

Cast aluminum construction with a 1" outside diameter nylon pulley on a 3/16" stainless steel axle. Designed to slip over the top of the flagpole and be secured by one 1/4"-20NC stainless steel set screw. The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a size 10-32 stainless steel pan head screw. Maximum halyard diameter is 1/4".

For External Halyard Poles • Cap Style • Stationary • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
ST-1-38	1 ³ / ₈ "	1.0	340000	\$22	\$20	340005	\$25	\$23	340010	\$25	\$23	340015	\$25	\$23
ST-1-12	1 ¹ / ₂ "	1.0	340001	22	20	340006	25	23	340011	25	23	340016	25	23
ST-1-34	1 ³ / ₄ "	1.0	340002	22	20	340007	25	23	340012	25	23	340017	25	23
ST-1-16	1 ⁵ / ₁₆ "	.80	340003	22	20	340008	25	23	340013	25	23	340018	25	23
ST-1-20	2"	.80	340004	22	20	340009	25	23	340014	25	23	340019	25	23



ST-32 SERIES

Cast aluminum construction with a 1⁷/₁₆" outside diameter cast pulley on a 1/4" stainless steel axles. Designed to slip over the top of the flagpole and be secured with three 5/16"-18NC stainless steel set screws. The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a 1/4"-20NC stainless set screw. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Stationary • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
ST-3	1 ⁷ / ₈ "	1.9	340040	\$45	\$40	340042	\$49	\$45	340044	\$49	\$45	340046	\$49	\$45
ST-2	2 ³ / ₈ "	1.7	340041	45	40	340043	49	45	340045	49	45	340047	49	45



OT SERIES

Cast aluminum construction with pulley (1⁷/₁₆" outside diameter on OTH, OT1 and OT25; 2" outside diameter on OT2, OT3, OT325 and OT35) on a 1/4" stainless steel axle. Designed to slip over the top of the flagpole and be secured by stainless steel set screws (one 1/4"-20NC on the OTH; three 5/16"-18NC on the OT1, OT2, OT25, OT3, OT325 and OT35). The top of is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The ornament is secured to the truck with a size 10-32 stainless steel pan head screw. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Stationary • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
OTH	2"	.55	340056	\$20	\$18	340062	\$23	\$21	340068	\$23	\$21	340074	\$23	\$21
OT1	2 ³ / ₈ "	.95	340057	27	23	340063	30	27	340069	30	27	340075	30	27
OT25	2 ¹ / ₂ "	.95	340058	29	25	340064	33	29	340070	33	29	340076	33	29
OT2	2 ³ / ₄ "	1.5	340059	30	27	340065	34	30	340071	34	30	340077	34	30
OT3	3"	1.3	340060	33	29	340066	36	33	340072	36	33	340078	36	33
OT325	3 ¹ / ₄ "	1.2	340343	34	30	340344	40	37	340345	40	37	340346	40	37
OT35	3 ¹ / ₂ "	1.8	340061	37	34	340067	40	37	340073	40	37	340079	40	37



RTC-1 SERIES

Cast aluminum construction with a 2" outside diameter cast pulley on a 1/4" stainless steel axle. The bottom portion of the spindle is designed to fit over the top of the flagpole and is secured with three stainless steel set screws (1/4"-20NC on the RTC-1-2 and RTC-1-138 & 5/16"-18NC on the RTC-1-238). The top is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize self-lubricating ball bearing assemblies. Maximum halyard diameter is 5/16".

For External Halyard Poles • Cap Style • Revolving • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTC-1-138	1 ³ / ₈ "	1.8	340351	\$73	\$65	340308	\$81	\$72	340309	\$81	\$72	340352	\$81	\$72
RTC-1-2	2"	1.6	340104	73	65	340106	81	72	340108	81	72	340110	81	72
RTC-1-238	2 ³ / ₈ "	1.9	340105	73	65	340107	81	72	340109	81	72	340111	81	72

All trucks on pages 170 thru 173 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 168 through 191 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired please call for pricing.

FLAGPOLE TRUCKS & ACCESSORIES



RTC-2 SERIES

Same description as our RTC-1 Series on the previous page, except this series is supplied with two pulleys.

For External Halyard Poles • Cap Style • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTC-2-138	1 ³ / ₈ "	2.5	340353	\$73	\$65	340310	\$81	\$72	340311	\$81	\$72	340354	\$81	\$72
RTC-2-2	2"	2.3	340120	73	65	340122	81	72	340124	81	72	340126	81	72
RTC-2-238	2 ³ / ₈ "	2.6	340121	73	65	340123	81	72	340125	81	72	340127	81	72



RTS-1 SERIES

Cast aluminum construction with a 2" outside diameter nylon pulley on a 1/4" stainless steel axle. This truck is designed to be used on flagpoles that have up to a 3 1/2" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize self-lubricating ball bearing assemblies. Maximum halyard diameter is 5/16".

For External Halyard Poles • Threaded Type • Revolving • Single Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-1-125	3 1/2"	1.9	340136	\$60	\$54	340137	\$66	\$60	340138	\$66	\$60	340139	\$66	\$60



RTS-2 SERIES

Same description as our RTS-1 Series above, except this series is supplied with two pulleys.

For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-2-125	3 1/2"	2.6	340144	\$66	\$60	340145	\$70	\$63	340146	\$70	\$63	340147	\$70	\$63



HDT-1 SERIES

Cast aluminum construction with a 3" outside diameter aluminum pulley on 1/2" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 5 1/2" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The truck body rotates on 26 stainless steel ball bearings on cast races. Maximum halyard diameter is 3/8".

For External Halyard Poles • Threaded Type • Revolving • Single Pulley

Note: The revolving arm of this truck can be modified for larger pole top diameters; contact us for a prompt quotation.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
HDT-1	5 1/2"	8.5	340335	\$140	\$127	340336	\$152	\$136	340337	\$152	\$136	340338	\$152	\$136



HDT-2 SERIES

Same description as our HDT-1 Series above, except this series is supplied with two 3 3/4" pulleys.

For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
HDT-2	5 1/2"	8.5	340152	\$140	\$127	340153	\$152	\$136	340154	\$152	\$136	340155	\$152	\$136

All trucks on pages 170 thru 173 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 168 through 191 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired please call for pricing.

FLAGPOLE TRUCKS & ACCESSORIES



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

EXTRA HEAVY-DUTY SERIES

Cast aluminum construction with 3/8" outside diameter aluminum pulleys on 1/2" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 12 3/4" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For ease of rotation, product life and strength, these trucks utilize stainless steel sealed lubricant ball bearing assemblies. Maximum halyard diameter is 3/8".

MODEL	SPINDLE MATERIAL	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
XHDT	ALUMINUM	9.7	340160	\$590	\$530	340162	\$620	\$560	340164	\$620	\$560	340166	\$620	\$560
XHDT-SS	STAINLESS STEEL	12	340161	1,036	935	340163	1,058	955	340165	1,058	955	340167	1,058	955



For Internal Halyard Poles • Cap Style • Stationary • Single Pulley

IH-1 SERIES

Cast aluminum construction for use on rope style internal halyard flagpoles. A small pulley assembly is added to the inside of a standard outrigger style truck to allow the halyard to feed from inside the flagpole. The pulley assembly has a 1 7/16" outside diameter cast nylon pulley on a 1/4" stainless steel axle and is held in place inside the truck by a 5/16"-18NC stainless steel set screw. The truck has a 2" outside diameter cast nylon pulley on a 1/4" stainless steel axle and is designed to slip over the top of the flagpole and be secured with three 5/16"-18NC stainless steel set screws. The top of the truck will accept an ornament with 1/2"-13NC threading as standard but can be supplied with other sizes of threading. The ornament is held in place by a size 10-32 stainless steel pan head screw. Maximum rope diameter is 5/16".

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IH-1-3	3"	1.6	340178	\$51	\$47	340180	\$58	\$51	340182	\$58	\$51	340184	\$58	\$51
IH-1-35	3 1/2"	2.3	340179	69	63	340181	78	70	340183	78	70	340185	78	70



For Internal Halyard Poles • Threaded Type • Revolving • Single Pulley

IH-2 SERIES

All of these cast aluminum trucks have a 1 1/4" NPT threaded spindle which screws into the top of the flagpole where a female fitting has been installed. The top of all trucks are designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied in other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The extra large model has stainless steel sealed lubricant bearing assemblies while all other sizes utilize stainless steel ball bearings in both upper & lower bearing races. All sizes are supplied with a stainless steel bushing at the cable exit point except the IHT-3 which has a bronze fitting.

MODEL	TRUCK BASE DIA.	TRUCK HT.	MAX. POLE TOP DIA.	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
					ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IHT-VR	5"	4 1/2"	3"	3.3	340194	\$167	\$152	340198	\$184	\$167	340206	\$184	\$167	340202	\$184	\$167
IHT-1	6 1/2"	6 1/2"	4"	6.4	340195	257	231	340199	279	251	340207	279	251	340203	279	251
IHT-2	7 1/2"	7 1/4"	5"	8.1	340196	310	279	340200	338	305	340208	338	305	340204	338	305
IHT-3	10 1/2"	8 1/2"	7 1/2"	16	340197	623	561	340201	690	621	340209	690	621	340205	690	621



For Internal Halyard Poles • Threaded Type • Stationary • Single Pulley

IHT-VS SERIES

Cast aluminum construction for use on rope style internal halyard flagpoles. A small pulley assembly is affixed to the inside of the truck housing to allow the halyard to feed from inside the flagpole. The pulley assembly has a 1 7/16" outside diameter cast nylon pulley on a 1/4" stainless steel axle. This truck is designed to be used on flagpoles that have up to a 3 1/2" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole. The top of the truck will accept an ornament with 1/2"-13NC threading as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. Maximum rope diameter is 5/16".

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
IHT-VS	3 1/2"	2.4	340312	\$70	\$63	340313	\$78	\$70	340314	\$78	\$70	340315	\$78	\$70

All trucks on pages 170 thru 173 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 168 through 191 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired please call for pricing.

FLAGPOLE TRUCKS & ACCESSORIES



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
RTS-2-150	4"	2.8	340170	\$112	\$102	340171	\$126	\$112	340172	\$126	\$112	340173	\$126	\$112

150 SERIES

Cast aluminum construction with 2" outside diameter aluminum pulleys on 3/8" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 4" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/2" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. The truck body rotates on 26 stainless steel ball bearings on cast races. Maximum halyard diameter is 5/16".



For External Halyard Poles • Threaded Type • Revolving • Double Pulley

MODEL	ITEM #	FITS POLE DIA.	1-5	6+	LBS.
RTSB	340168	4"	\$280	\$260	4.7

BA SERIES

Cast bronze alloy construction with 2" outside diameter nylon pulleys on 1/4" stainless steel axles. This truck is designed to be used on flagpoles that have up to a 4" outside top diameter with female fitting installed. The bottom of the spindle has a 1 1/4" NPT threading and is screwed into the top of the flagpole while the top spindle is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. The ornament is secured to the truck with a 1/4"-20NC stainless steel set screw. For additional ease of rotation, product life and strength, these trucks utilize stainless steel sealed lubricant ball bearing assemblies. Maximum halyard diameter is 5/16".



For External Halyard Poles • Slip Fit Type • Stationary • Single Pulley

WHITE			BRONZE #313			LBS.
ITEM #	1-5	6+	ITEM #	1-5	6+	
340226	\$78	\$70	340227	\$83	\$73	1.4

FIBERGLASS-1 SERIES

Molded fiberglass construction with 3/4" outside diameter nylon pulley on a 3/16" stainless steel axle. The stem of the truck is designed to slip into a 2" inside diameter pole top and is held in place by drilling thru the pole and securing the truck to the pole with an appropriate size bolt or screw (not included). The top of the truck is designed to accept an ornament with a spindle threading of 1/2"-13NC. Maximum halyard size is 1/4".



For External Halyard Poles • Threaded Type • Stationary • Double Pulley

WHITE			BRONZE #313			LBS.
ITEM #	1-5	6+	ITEM #	1-5	6+	
340228	\$78	\$70	340229	\$83	\$73	2.5

FIBERGLASS-2 SERIES

Molded fiberglass construction with 1 1/2" outside diameter nylon pulleys on 1/4" stainless steel axles. The top of the truck is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading if desired. The aluminum spindle is threaded 1 1/4" NPT. Maximum halyard diameter is 5/16".



For Internal Halyard Poles • Threaded Type • Stationary • Single Pulley

WHITE			BRONZE #313			LBS.
ITEM #	1-5	6+	ITEM #	1-5	6+	
340232	\$78	\$70	340233	\$83	\$73	2.8

FIBERGLASS-IH SERIES

Molded fiberglass construction with a 1 1/2" outside diameter nylon pulley. This stationary truck is designed to be used on flagpoles that have up to a 3 1/4" outside top diameter with female fitting installed. The spindle has 1 1/4" NPT threading and is screwed into the top of the flagpole. The spindle is hollow allowing the halyard to feed from inside the flagpole. The top of the truck will accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading. Maximum halyard diameter is 5/16".

All trucks on pages 170 thru 173 except the fiberglass trucks can be mixed to achieve the higher quantity pricing.

All bronze colored accessories on pages 168 through 191 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired please call for pricing.


FLAGPOLE TRUCKS & ACCESSORIES



POLE TOP ADAPTERS

These adapters are used in mounting a truck that has a spindle threading of 1/4" NPT and the pole does not have a threaded top plug installed. The adapter is tapped 1/4" NPT and is designed to slip over the top of the pole and is secured by three 1/4"-20NC stainless steel set screws. Please specify color when ordering. If not specified, silver will be supplied. Pole Top Adapters can be mixed to achieve the higher quantity pricing.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
PTA-238	2 3/8"	1.1	340238	\$47	\$42	340247	\$51	\$47	340256	\$51	\$47	340265	\$51	\$47
PTA-212	2 1/2"	.90	340239	47	42	340248	51	47	340257	51	47	340266	51	47
PTA-3	3"	1.2	340240	63	58	340249	69	63	340258	69	63	340267	69	63
PTA-312	3 1/2"	1.5	340241	63	58	340250	69	63	340259	69	63	340268	69	63
PTA-4	4"	2.1	340242	75	67	340251	83	73	340260	83	73	340269	83	73
PTA-412	4 1/2"	2.3	340243	75	67	340252	83	73	340261	83	73	340270	83	73
PTA-5	5"	2.7	340244	75	67	340253	83	73	340262	83	73	340271	83	73
PTA-512	5 1/2"	3.2	340245	98	89	340254	107	95	340263	107	95	340272	107	95
PTA-6	6"	4.0	340246	98	89	340255	107	95	340264	107	95	340273	107	95

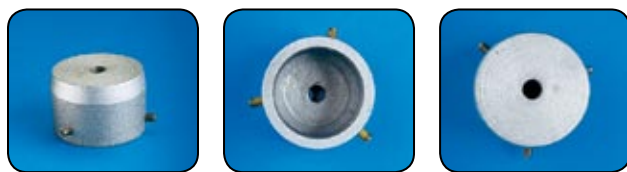

FLAGPOLE CAPS

Cast aluminum construction designed to slip over the top of the flagpole and be secured with three 1/4"-20NC stainless steel set screws. The top of the cap is designed to accept an ornament with a spindle threading of 1/2"-13NC as standard but can be supplied with other sizes of threading or no threading. Please specify color when ordering. If not specified, silver will be supplied.

MODEL	FITS POLE DIAMETER	LBS.	SILVER			BRONZE #313			WHITE			BLACK		
			ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+	ITEM #	1-5	6+
FC-20	2"	.60	340274	\$17	\$15	340276	\$20	\$18	340278	\$20	\$18	340280	\$20	\$18
FC-212	2 1/2"	.60	340275	20	18	340277	22	20	340279	22	20	340281	22	20



PULLEY & EYEBOLT ASSEMBLIES

Includes Hex Nut, Washer & Lock Washer



MODEL	ITEM #	OVERALL LENGTH	THREAD LENGTH	BOLT THREADING	BOLT MATERIAL	PULLEY HOUSING MATERIAL	PULLEY MATERIAL	MAX. ROPE DIAMETER	1-5	6+	LBS.
DELUXE	340236	4 1/8"	2 3/8"	5/16"-18NC	STAINLESS STEEL	STAINLESS STEEL	NYLON	5/16"	\$16.00	\$15.00	.02
STANDARD	340237	3 1/8"	1"	#8-32NC	ZINC PLATED STEEL	ZINC	ZINC	3/16"	5.10	4.60	.07



NYLON

ROPE PULLEYS

ITEM #	DIA.	WIDTH	MATERIAL	MAXIMUM AXLE DIA.	MAXIMUM ROPE DIA.	1-5	6+	LBS.
340302	1"	3/8"	NYLON	3/16"	1/4"	\$2.70	\$2.40	.01
340303	1 7/16"	11/16"	NYLON	1/4"	5/16"	2.90	2.70	.02
340320	2"	1/2"	NYLON	1/4"	5/16"	3.40	3.00	.04
340304	2"	11/16"	NYLON	1/4"	5/16"	3.70	3.40	.04
340305	3 3/4"	3/4"	ALUMINUM	1/2"	3/8"	20.00	18.00	.45



ALUMINUM



VERTICAL MOUNT PULLEY ASSEMBLIES

Cast aluminum construction with a 1-7/16" outside diameter cast nylon pulley on a 1/4" stainless steel axle. Attaches with two 1/4"-20NC stainless steel flat head screws or two stainless steel straps (screws and/or straps not included). Maximum halyard diameter is 5/16". Not supplied as standard with holes drilled for mounting. Add \$2.00 for drilling.

ITEM #	COLOR	1-5	6+	LBS.
340298	SILVER	\$21	\$19	.60
340299	BRONZE #313	24	22	.60
340300	BLACK	24	22	.60
340301	WHITE	24	22	.60



THREADED TOP PLUGS

Screws into top of pole with 1/4" NPT threading and allows for insertion of ornament with either a 1/2"-13NC or 5/8"-11NC spindle threading.

ITEM #	FOR ORNAMENT SPINDLE SIZE	1-5	6+	LBS.
340306	1/2"-13NC	\$25	\$23	.25
340307	5/8"-11NC	27	24	.25

All bronze colored accessories on pages 168 through 191 are supplied in a dark bronze #313 shade. If medium bronze #312, light bronze #311 or a custom color is desired please call for pricing.